
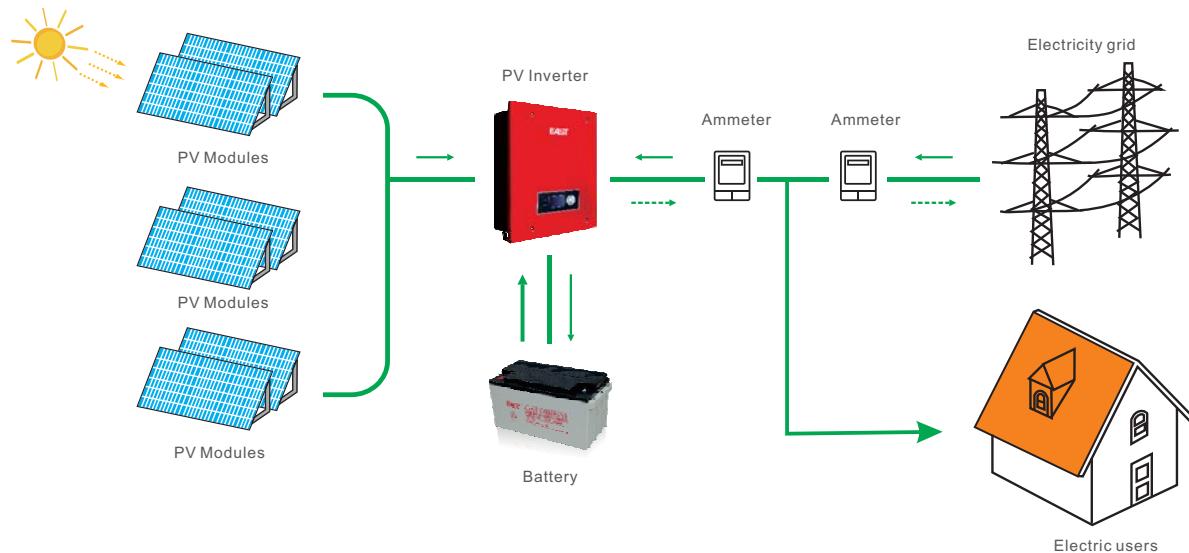


Hybrid (Bi-direction) Solar Inverter

1KW ~ 3KW (with isolated transformer)

PF = 1

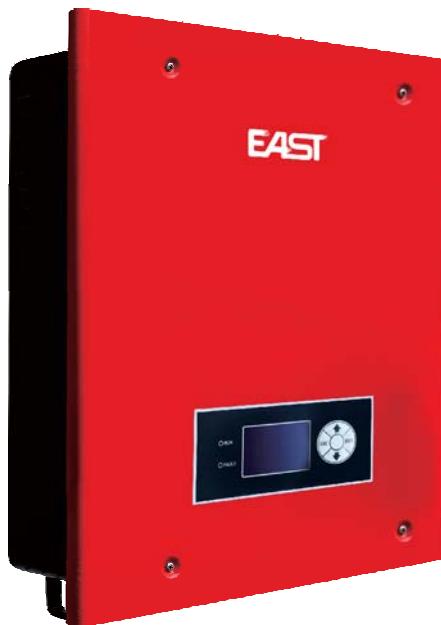

Features

- PV energy combined with flexible energy storage systems: enable households to store surplus electricity generated by solar panel array, and power not being utilised can be exported to the mains grid.
- Advanced MPPT algorithm
- Built-in transformer to ensure electric safety
- Intelligent battery management, configurable charging current
- Effective protections: overload, short circuit, overdischarge, overcharge, battery reverse polarity, PV reverse polarity protections
- No PID attenuation damage for solar panels to ensure its service life
- Unique ECO mode, daily consumption less than 1% at no-load standby
- Staggering energy storage and power generation

Specifications

MODEL	HE1K	HE2K	HE3K
Rated power	1 KW	2 KW	3 KW
Output power factor		1	
Operating mode		Grid-connected mode / backflow prevention mode (settable)	
PV INPUT			
Max. input voltage (Voc)		150 Vdc	
Optimum operating voltage (Vmp)		70 ~ 115 Vdc	
Max. conversion efficiency		≥ 98%	
Max. charging current	23 ± 2 A	48 ± 2 A	62 ± 2 A
Recommended PV configuration	≤ 1.5 KW	≤ 2.8 KW	≤ 3.5 KW
AC INPUT			
Input voltage range		170 ~ 264 Vac	
Rated Input frequency		50 Hz / 60 Hz (settable)	
Frequency range		50 Hz / 60 Hz ± 2.5 Hz	
Power factor		0.98	
Max. charging current	18 ± 2 A	38 ± 2 A	58 ± 2 A
INVERTER			
Inverter voltage		230 Vac (220 Vac / 240 Vac settable)	
Waveform		Sinusoidal	
THD (linear load)		≤ 3%	
Overload		≥ 110%: transfer to bypass in 4 mins or shut down in off-grid ≥ 125%: transfer to bypass in 1 min or shut down in off-grid ≥ 150%: transfer to bypass in 5 s or shut down in off-grid ≥ 180%: shut down in 0.5 s	
Max. efficiency		≥ 85%	
BATTERIES			
Battery type		VRLA AGM maintenance-free battery	
Battery voltage		48 Vdc	
Number of battery		12 Vdc × 4 pcs 2 Vdc × 24 pcs	
DOD (depth of discharge)		Settable	
Floating charge voltage		56 Vdc	
Charging current		0.05 C ~ 0.3 C (settable)	
Intelligent management		Auto floating charge, auto temperature compensation (optional)	
COMMUNICATIONS			
Remote control		Transfer to bypass or inverter; shut down	
Communication interface		RS232 / USB / RS485 ; SNMP / WiFi / Bluetooth (optional)	
OTHERS			
Operating temperature		0°C ~ 40°C	
Max. relative humidity		95% (non-condensing)	
Max. altitude		1000 m at rated power (derating 1% for each additional 100 m); Max. 4000 m	
Cooling		Forced ventilation (fan speed varies with loads)	
Noise level at 1 m		≤ 50 dB (varies with loads and temperature)	
IP rating		IP21	
Dimensions (W × D × H) (mm)		480 × 380 × 202	480 × 380 × 217
Packaged dimensions (W × D × H) (mm)		545 × 458 × 278	545 × 458 × 295
Net weight (kg)	18.8	27.7	35
Gross weight (kg)	19.8	28.7	36

● All specifications subject to change without notice.